

BCAP0310 P270 T10



FEATURES AND BENEFITS

- Round, radial mounting design for easy surface mount assembly
- Over 500,000 duty cycles
- 10 year life capability
- Ultra-low internal resistance

APPLICATIONS

- Automotive subsystems
- Industrial power back up
- Portable power tools
- Renewable energy systems

PRODUCT SPECIFICATIONS

| CAPACITANCE | |
|---|-------------------------|
| Nominal capacitance | 310 F |
| Capacitance tolerance | +20% / -0% |
| VOLTAGE | |
| Rated voltage | 2.7 V DC |
| Surge voltage | 2.85 V DC |
| Isolation voltage | N/A |
| RESISTANCE | |
| ESR, DC | 2.2mΩ |
| Resistance tolerance | Max. |
| Thermal resistance (Rth) | 10.9°C/W |
| TEMPERATURE | |
| Operating temperature range | -40°C to +65°C |
| Storage temperature range | -40°C to +70°C |
| Temperature characteristics | |
| Capacitance change | ± 5% of value at 25°C |
| Internal resistance | ± 150% of value at 25°C |
| POWER | |
| Pd | 6,400 W/kg |
| ENERGY | |
| E _{max} | 5.06 Wh/kg |
| LIFESPAN | |
| Endurance After 1,000 hours application of rated voltage at 65°C. | |
| Capacitance change | <20% decrease |
| Internal resistance | <25% increase |
| Life test After 10 years at rated voltage and 25°C. | |
| Capacitance change | ≤20% decrease |
| Internal resistance | ≤100% increase |
| CYCLES | |
| Cycles - Capacitors cycles between specified voltage and half rated voltage under constant current at 25°C (500,000 cycles) | |
| Capacitance change | ≤20% decrease |
| Internal resistance | ≤100% increase |

| CURRENT | |
|---|-------------|
| Leakage current | 0.45 mA |
| After 72 hours at 25°C. Initial leakage current can be higher. | |
| Short circuit current (I _{sc}) | 1,220 A |
| CAUTION: Current possible with short circuit from U _R . Do not use as an operating current. | |
| Maximum continuous current | 30 A |
| Maximum peak current, 1 sec | 240 A |
| CONNECTION | |
| Terminal | Radial |
| SIZE | |
| Dimensions | See drawing |
| Volume | 0.053 L |
| Mass | 62g |

MOUNTING RECOMMENDATIONS

Solder tabs to PCB. See application note for further information and slot spacing recommendations. For proper mounting, the use of a holder or spacer between the cell and the PCB is required.

MARKINGS

Parts are marked with the following information: Rated capacitance, rated voltage, product number, name of manufacturer, positive and negative terminal, warning marking, serial number.

ADDITIONAL TECHNICAL INFORMATION

Capacitance and ESR, DC measured per document no. 1007239, available at www.maxwell.com.

I_C = leakage current after 72 hours at 25°C

$$I_{sc} \text{ (short circuit current)} = \frac{V_{RATED}}{ESR}$$

R_{th} = thermal resistance

$$E_{max} = \frac{\frac{1}{2} CV^2}{3,600 \times mass}$$




$$P_{max} = \frac{V^2}{4R(1kHz) \times mass}$$

$$P_d = \frac{0.12V^2}{R(DC) \times mass}$$





BCAP0310 P270 T10

PRODUCT SPECIFICATIONS

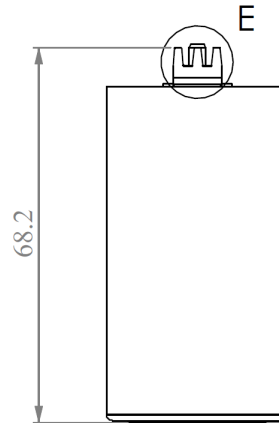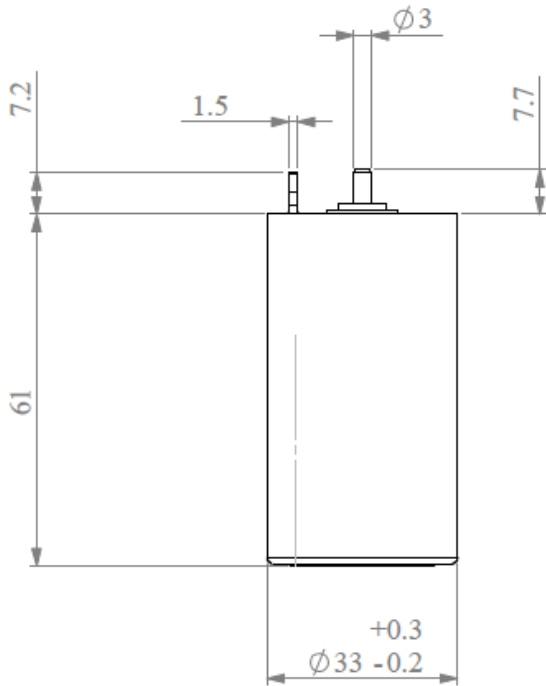

Board drillings
Board thickness : 1.5 to 2.4 mm

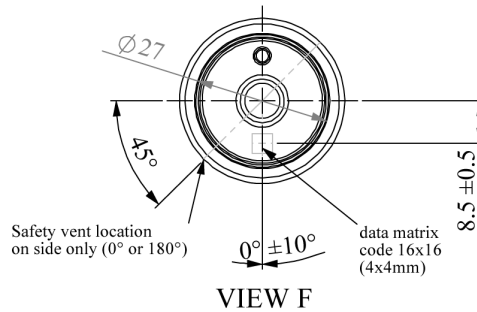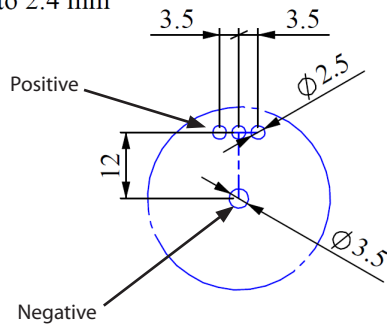

Product dimensions are for reference only unless otherwise identified. Product dimensions and specifications may change without notice. Please contact Maxwell Technologies directly for any technical specifications critical to application.

DATA
SUPPLIED
BY

YEG Components

www.yegcomponents.com

YEG Components (a division of Young Electronics Group)

Coronation Road, Cressex Business Park, High Wycombe, Buckinghamshire HP12 3TA

Tel: +44 (0) 1494 753500 Fax: +44 (0) 1494 753501 Email: sales@youngelectronics.com

US Free Call: +1 877 511 4324
Fax: +1 858 503 3301

F: +49 (0)8105 24 16 19

Fax: +86 21 5836 5620

Online: www.maxwell.com • Email: info@maxwell.com